



FLAT DISPLAY TECHNOLOGY



This product is RoHS compliant

§ BRIEF SPECIFICATION §

FDT Tech Module No: **LOF121X15P-x0R**

Description: **12.1" Digital TFT- LCD Module**

SPEC No.: **SAS-1406004**

Version: **1.7**

Issue Date: **January 22, 2024**

※ This specification contains 6 pages including the cover and appendix.



Features

- Full Flat Panel Design
- 12.1" (1024x768) Digital TFT LCD
- Aspect Ratio: 4:3
- Input Signal VGA / DVI-D / HDMI 1.3a
- Maximum Support Resolution 1920x1080
- Stereo Audio Amplifier, Output 2W@4Ω Speaker
- Audio Line-In
- 2 Points Projected Capacitive Touch
- 5 Key Buttons Control
- 9 Language OSD Menu
- LED Backlight
- Single Operation Voltage +12V

Applications

- Industrial
- Medical Environment
- Instrument Display
- Kiosk
- Security
- Signage
- Office Electronics
- Home Application
- Educate Application



Specifications

LCD	
Panel Size	12.1"
Resolution (Pixels)	1024x768
Color	16.2M
Luminance without TP	500 cd/m ²
Luminance (PCAP)	435 cd/m ²
Contrast Ratio	1000
View Angle	89(L) / 89(R) / 89(T) / 89(B)
LED Life Time (Min.)	30K hours
Power Requirement	
Power Input (DC Jack 2.1 ϕ)	+12 Vdc
Power Consumption@+12V	12.12 Watts (@Without Amplifier)
Touch Screen	
PCAP Type	USB Interface (2 Points)
Projected Capacitive Touch Support OS	Windows / Linux

Input Signal		
VGA	D-Sub15	
DVI	DVI-D	
HDMI	1.3a	
Audio		
Amplifier	1W@8Ω / 2W@4Ω	
Line-In	Stereo Input Phone Jack ϕ 3.5	
Controls		
Key	5 Buttons	
Serial Remote Control	RS232 (Option)	
Mechanical		
Construction	Aluminum Front Bezel with Completely Covered Glass and SECC steel chassis	
Mounting Type	Panel / VESA 100 x 100 Mount	
Environment		
Temperature Range	Operating	-20~+70°C
	Storage	-30~+70°C
High Temperature & High Humidity (Non-condensing)	Operating	+40°C / 90%

Order Information

■ Unit

Item	LOF121X15P-00R	LOF121X15P-10R
VGA	⊙	⊙
DVI	⊙	⊙
HDMI	⊙	⊙
Touch Panel Type	Projected Capacitive Touch	Projected Capacitive Touch
Touch Screen Interface	USB	USB
Audio Amplifier	⊙	⊙
Audio Line-In	⊙	⊙
5 Keys	⊙	⊙
Waterproof	-	IP54
Condition	Standard	Non-standard


■ Customized

Function	Item		Remark
Audio	Head Phone For HDMI (Output)		
Serial Remote Control	RS232 (DB9)		
Power Input Connector	Terminal Socket 2P 5.08mm (Male)(on Module)		
	Terminal plug 2P 5.08mm (Female)(For Cable)		Matching Terminal Socket

Note: Special order condition will apply to non-standard items and pls contact salespersons in FDT.



Dimension

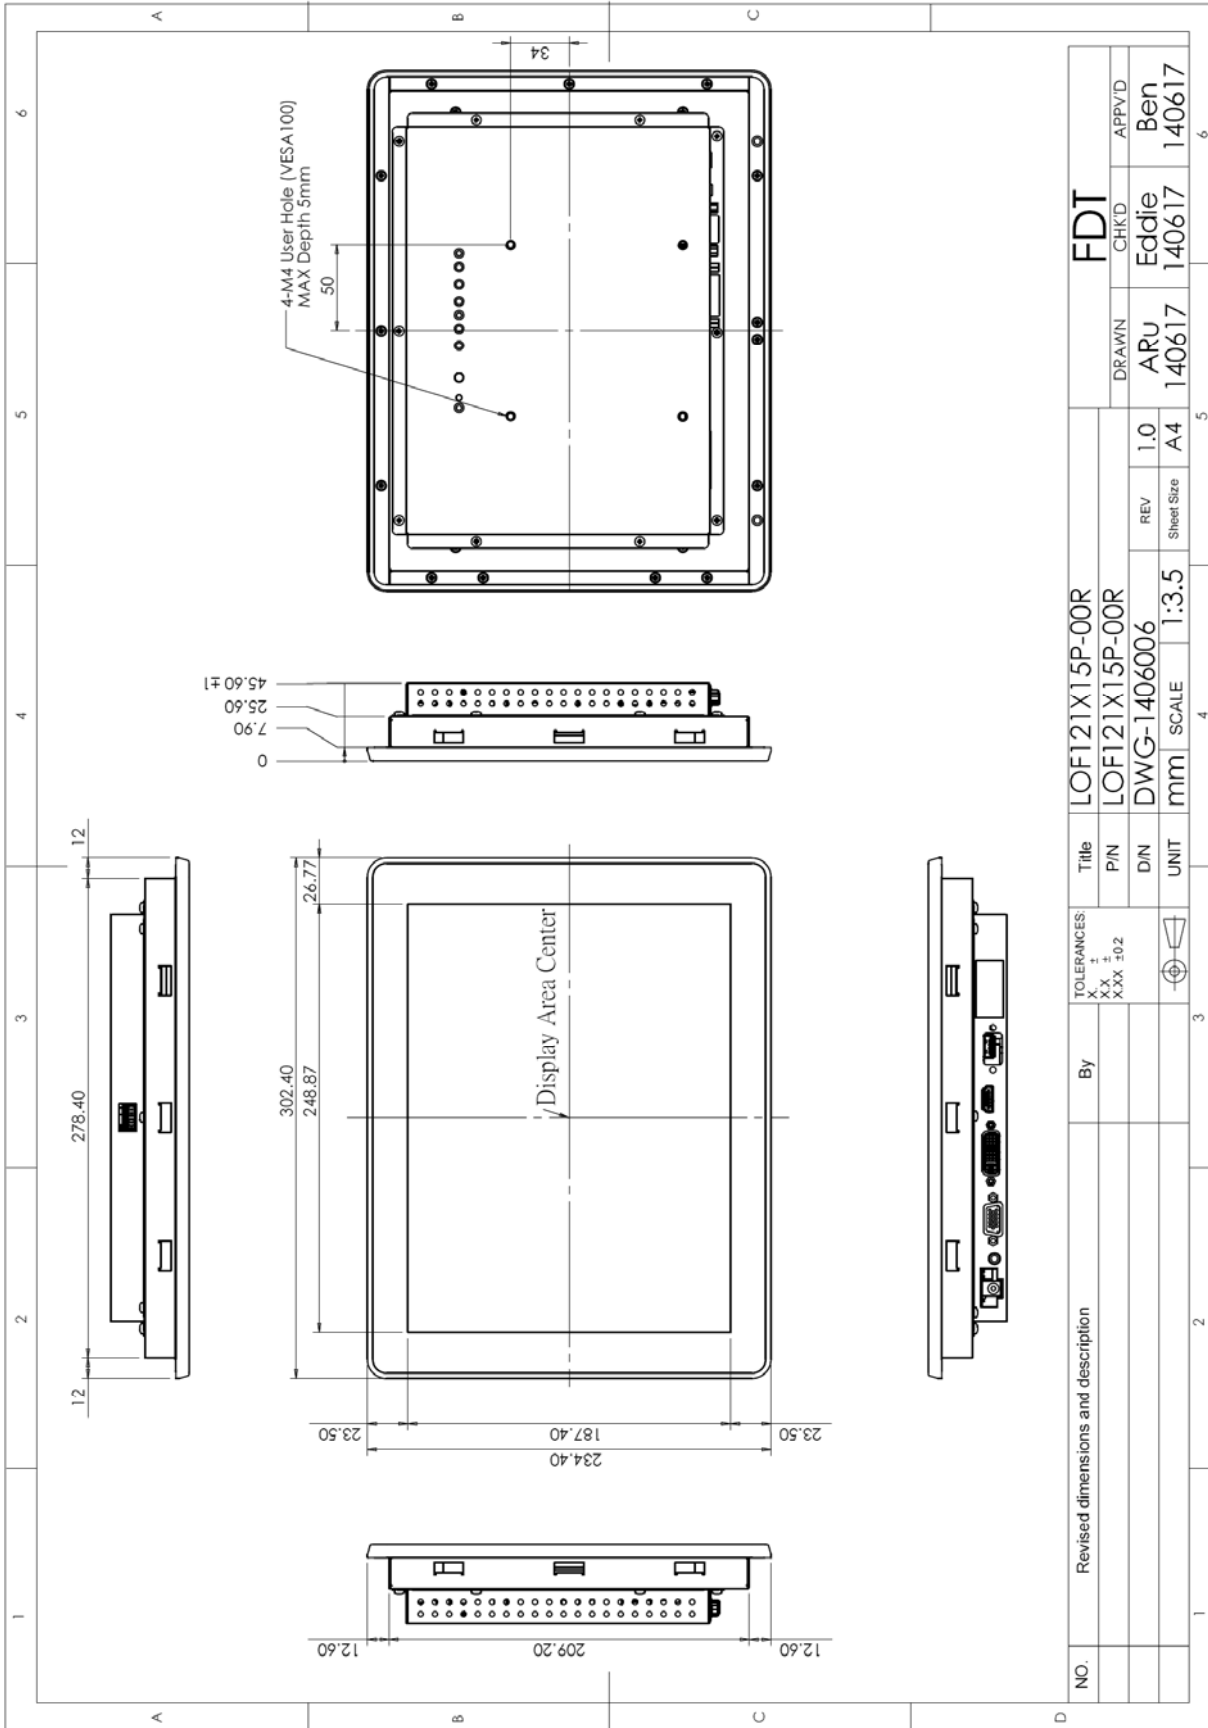

Accessories (Option)

Before you begin installing the Open Frame, please make sure that the following materials have been shipped:



A. LASTD12033-FDR



B. LAACD18000-FDR



C. LACABLE068-FDR



D. LACABLE069-FDR



E. LAVGA18000-FDR



F. LAUSB18000-FDR



G. LACABLE070-FDR



H. LASPKR0004-FDR



I. LASCW00003-FDR

- A. AC to DC Adapter (L:1500mm,100-240V_{AC} 50-60Hz to +12V_{DC} @ 3.3A, ϕ 2.1)
- B. Power Cord (L:1800mm, Plug Type B for USA)
- C. HDMI Cable (L:1800mm)
- D. DVI Cable (L:1800mm)
- E. VGA Cable (L:1800mm)
- F. USB Cable (L:1800mm)
- G. AUDIO Cable (L:1800mm)
- H. Speaker (2.5W @ 4 Ω L:400mm *2 Pieces)
- I. Mount Clamp and Screw *12 Pieces